

- NOTES:**
- ALL DIMENSIONS SHOWN IN TABLE ARE IN INCHES, UNLESS OTHERWISE NOTED & ARE ± 1 INCH (25MM).
 - ALL ITEMS SHOWN IN PHANTOM LINE ARE TO BE PROVIDED BY OTHERS.
 - ALL DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT ANY NOTICE.
 - INSTALL UNIONS FITTINGS ON INLET, OUTLET & DRAIN PLUMBING CONNECTIONS.
 - PROVIDE A 2 FEET MINIMUM CLEARANCE ABOVE MINERAL TANK FOR FILLING MEDIA.
 - A GFCI EQUIPT ELECTRICAL OUTLET SHOULD BE PROVIDED WITHIN 5 FEET OF EQUIPMENT LOCATION.
 - USE DIELECTRIC UNIONS ON PLUMBING CONNECTIONS OF CONTROL VALVE WHEN DISSIMILAR METALS ARE PRESENT.
 - PROVIDED SYSTEM SHALL NOT BE SUBJECT TO ANY VACUUM. IF RISK OF VACUUM IS PRESENT, INSTALL SIPHON BREAK ON DRAIN LINE & INSTALL VACUUM RELIEF VALVE WATTS ORDERING CODE # 0556031 ON INLET LINE.
 - BRINE TANK DIMENSIONS SHOWN ON TABLE ARE FACTORY SELECTED FOR USE WITH THE SPECIFIED SYSTEM SIZE.
 - DO NOT INSTALL DRAIN LINE DIRECTLY TO A DRAIN. FOR PROPER DRAIN CONNECTION FOLLOW ALL NATIONAL, STATE AND LOCAL CODES. DO NOT CONSTRUCT DRAIN LINE TO ELEVATIONS THAT EXCEED 4 FEET ABOVE THE CONTROL VALVE'S DRAIN PORT.
 - THE FULL WEIGHT OF THE PIPING AND VALVES MUST BE SUPPORTED BY PIPE HANGERS OR OTHER MEANS.
 - INLET AND OUTLET HEADERS NEED TO BE SIZED ACCORDING TO FLOW RATE REQUIREMENTS BY OTHERS.
 - POWER REQUIREMENTS: 115V/60HZ 2.7 AMPS PER CONTROL VALVE UNLESS OTHERWISE SPECIFIED.
 - BRINE TANK MUST BE LOCATED WITHIN 10 FEET OF SYSTEM CONTROL VALVE AND ON A COMMON FLOOR ELEVATION WITH MINERAL TANK TO ENSURE PROPER BRINE DRAW OPERATION.
 - USE A MINIMUM OF 1 INCH SCH 40 PVC PIPING FOR CONSTRUCTION OF BRINE LINE.
 - LIMIT INLET PRESSURE TO NOT EXCEED MAXIMUM PUBLISHED OPERATING PRESSURE.

SERIES PWS30-P TRIPLEX PROGRESSIVE DIMENSION (INCHES) & SPECIFICATIONS																		
MODEL NO.	ORDERING CODES (EDP NO.)	MINERAL TANK SIZE	INLET	OUTLET	OVERALL HEIGHT (SEE NOTE 5)	OVERALL DEPTH	OVERALL WIDTH	MINIMUM INLET PIPE DISTANCE	BRINE TANK (SEE NOTE 9)	CONTROL VALVE INLET/OUTLET PIPE SIZE (NPT)	DRAIN CONN. SIZE (NPT)	SERVICE FLOW GPM @ 15 PSI DROP	PEAK SERVICE FLOW GPM @ 25 PSI DROP	DRAIN FLOW RATE (GPM)	MIN/MAX OPERATING TEMP F°	MIN/MAX OPERATING PRESSURE (PSI)	ESTIMATED OPERATING WEIGHT (LBS)	ESTIMATED SHIPPING WEIGHT (LBS)
PWS30151H33	7100656	24 X 72	79.44	79.44	95.25	24.5	126.4	7.0	30 X 50	3.0	1.0	360	510	15	34/110	25/125	10069	3210
PWS30151J33	7100657	30 X 72	81.44	81.44	96.75	30.13	132.6	9.5	39 X 48	3.0	1.5	474	424	25	34/110	25/125	15471	4800
PWS30151J33	7100658	36 X 72	87.25	87.25	101	36.13	142.6	12.0	39 X 60	3.0	1.5	555	750	35	34/110	25/125	19982	6045
PWS30151K33	7100659	42 X 72	95.25	95.25	108	44	145.6	14.5	42 X 60	3.0	2.0	600	804	50	34/110	25/125	26582	9735
PWS30151L33	7100660	48 X 72	99.63	99.63	112.38	50.38	159.6	17.0	50 X 60	3.0	2.0	639	840	60	34/110	25/125	36591	12885

WATTS
815 CHESTNUT ST. NORTH ANDOVER, MA 01845

THIS DRAWING IS THE PROPERTY OF WATTS TECHNOLOGIES, INC. AND MAY NOT BE USED OR REPRODUCED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF WATTS TECHNOLOGIES, INC.

DATE: 2/2/2021
DATE: 2/2/2021

SCALE: NTS
SHEET: 1 OF 1

SUPERSEDES:

LIMITS UNLESS SPECIFIED: FRACTIONAL ANGULAR 1/16" 30°




TITLE: GENERAL INSTALLATION, SERIES PWS30-P
TRIPLEX PROGRESSIVE 3" WATER SOFTENERS

PART NO.: SEE TABLE

MATERIAL: N/A

OTHER: ESTIMATED WEIGHT: SEE TABLE

EDP NO.: SEE TABLE
FILE TYPE: CAD
SIZE: D
REV: 1

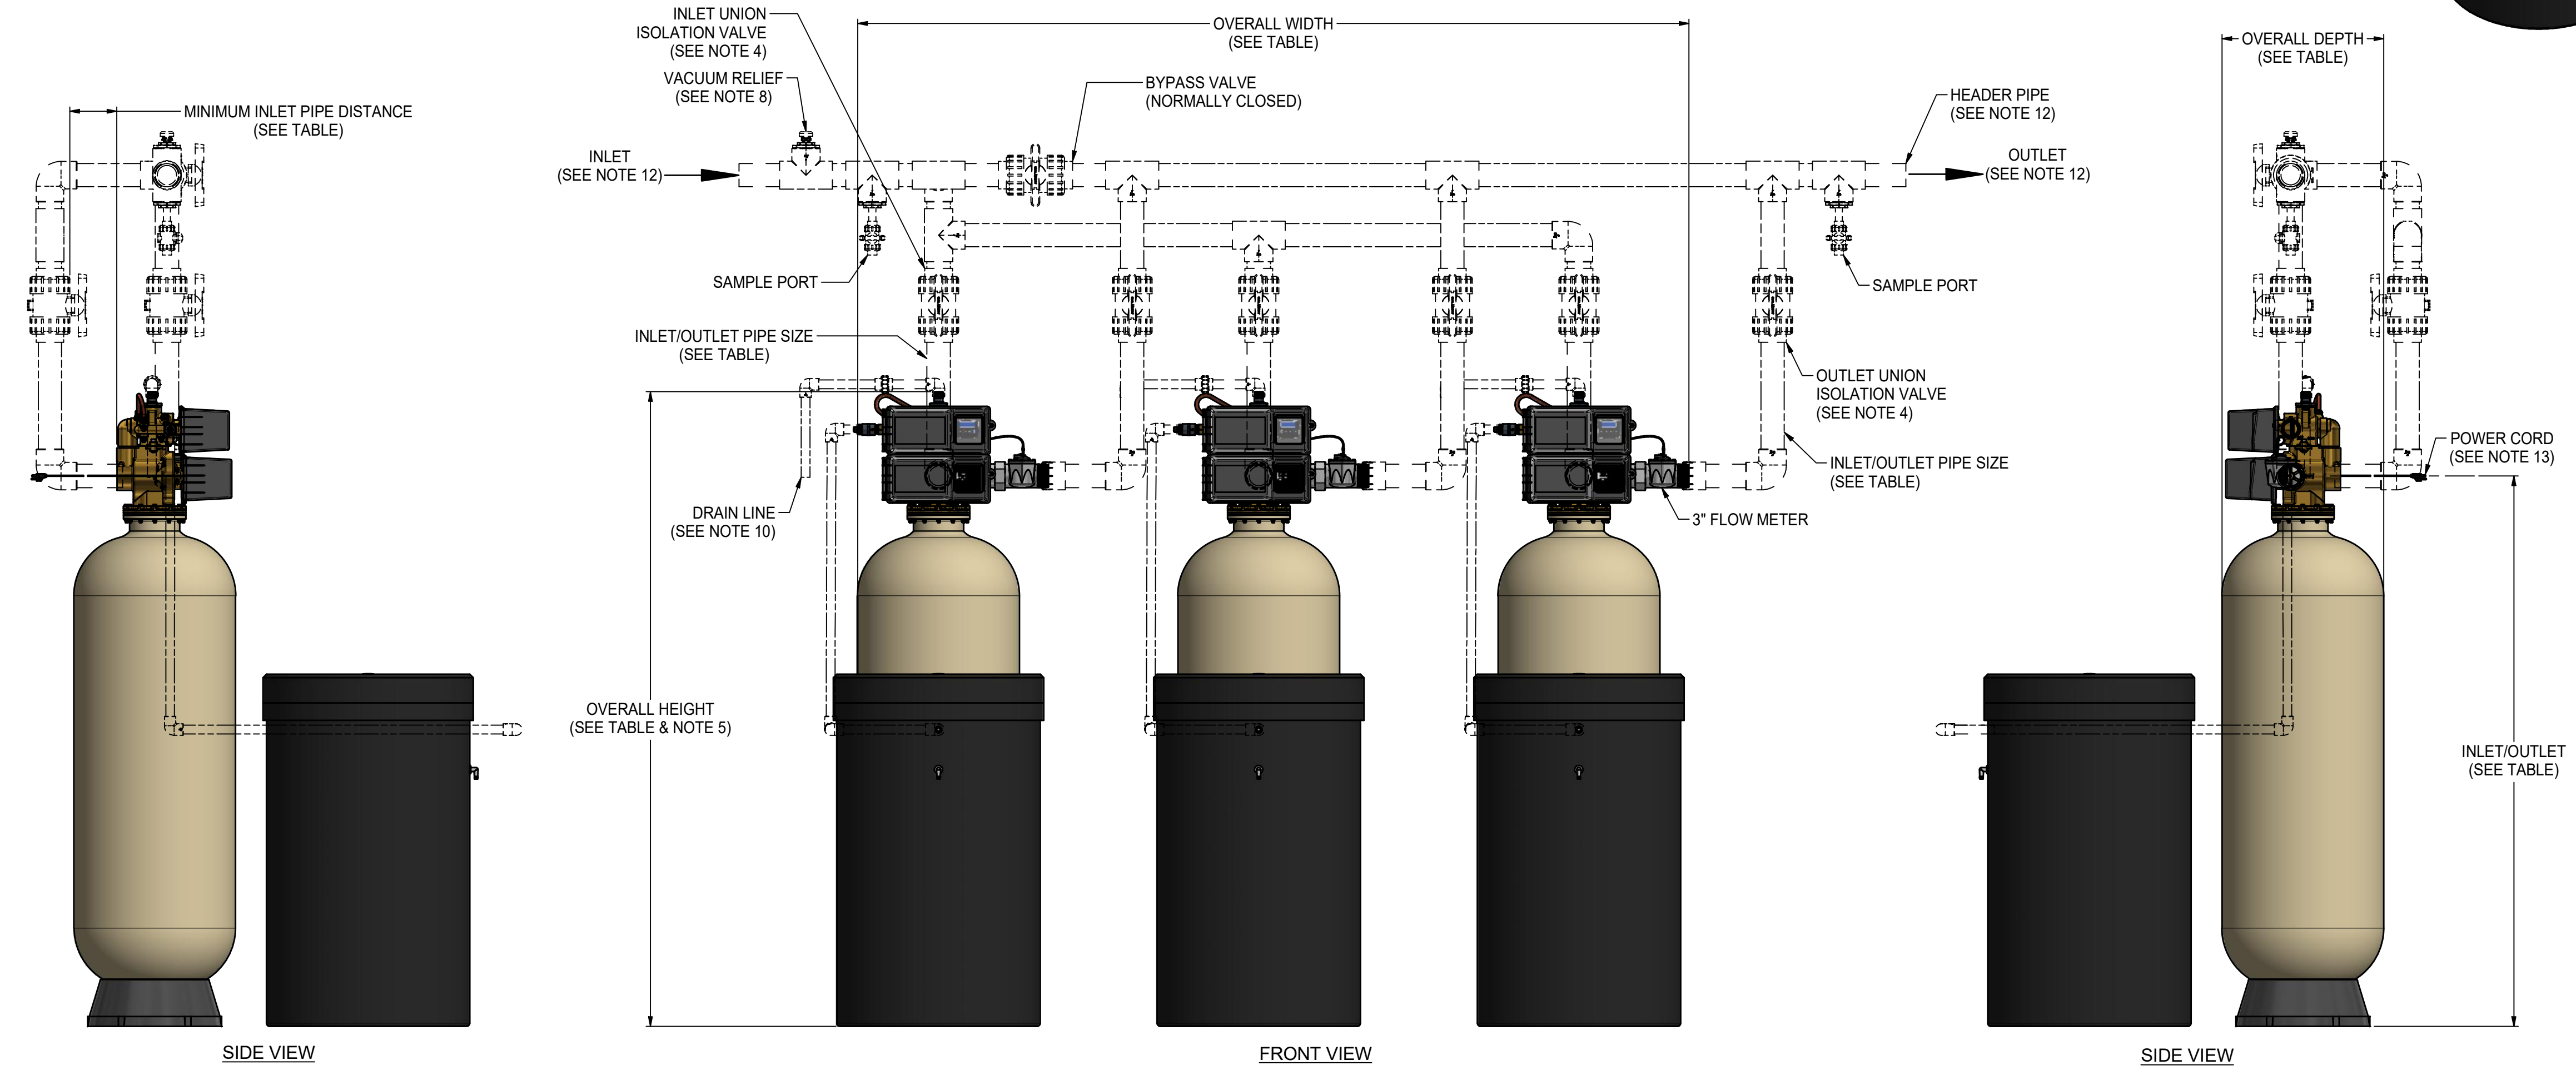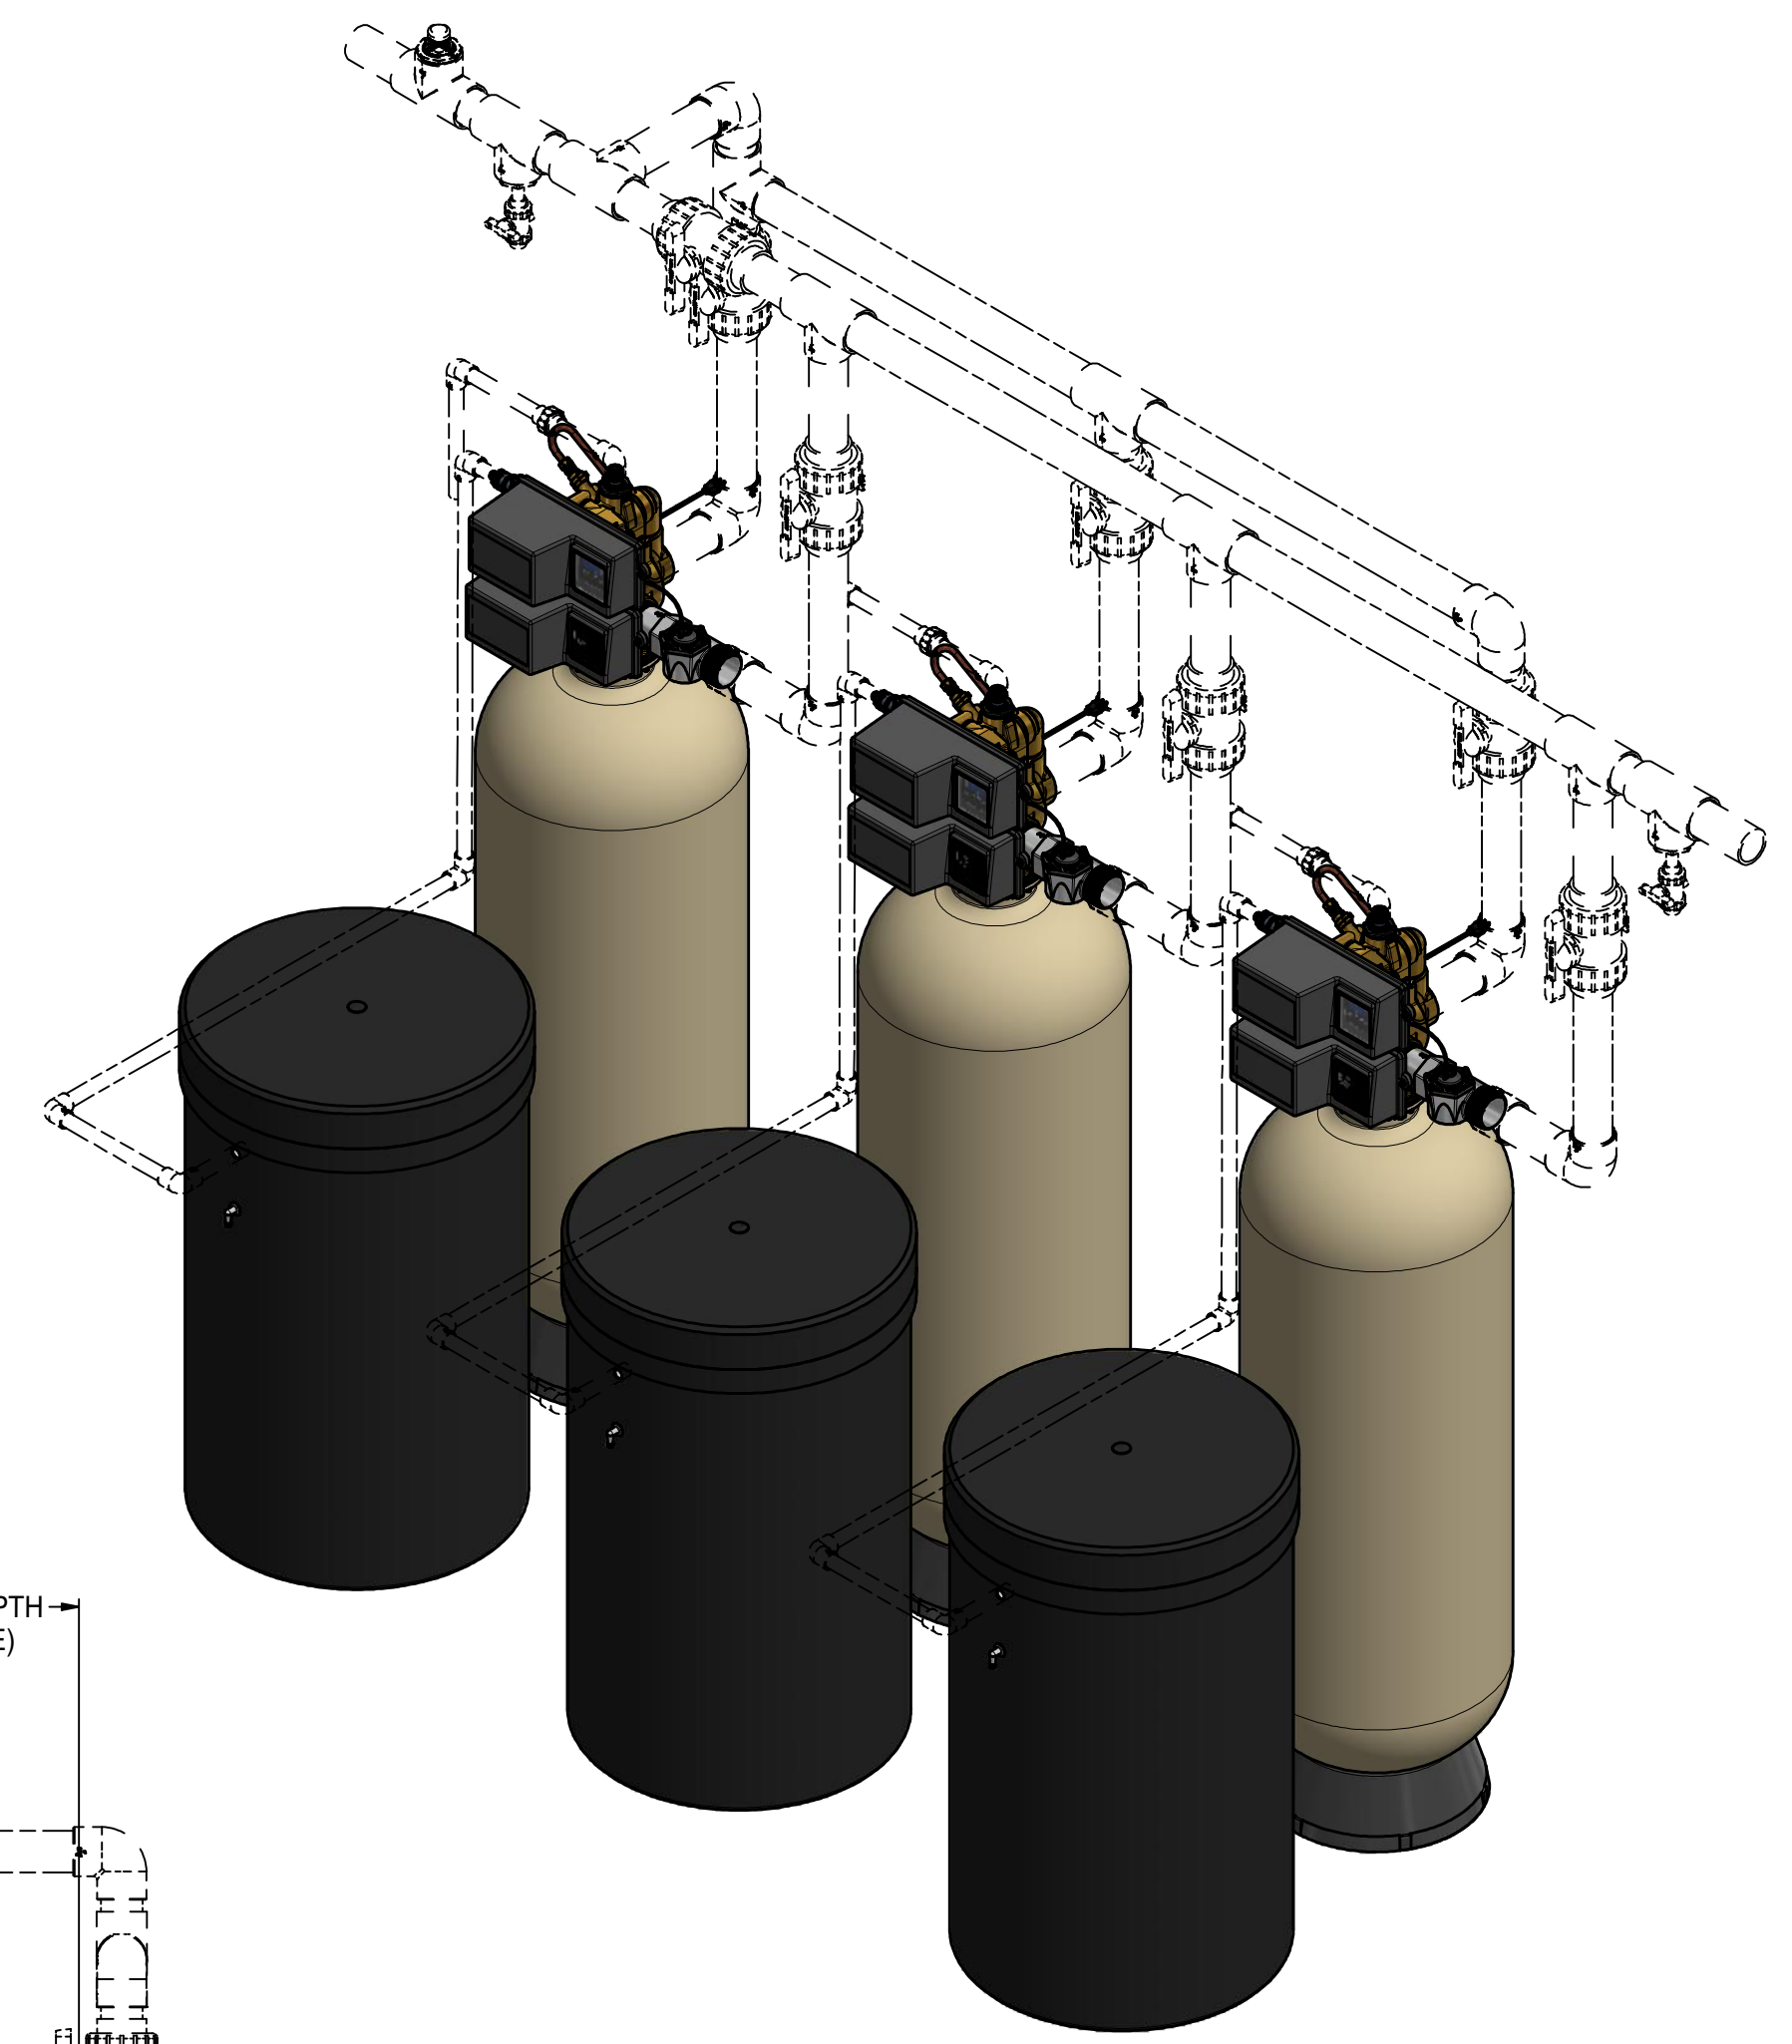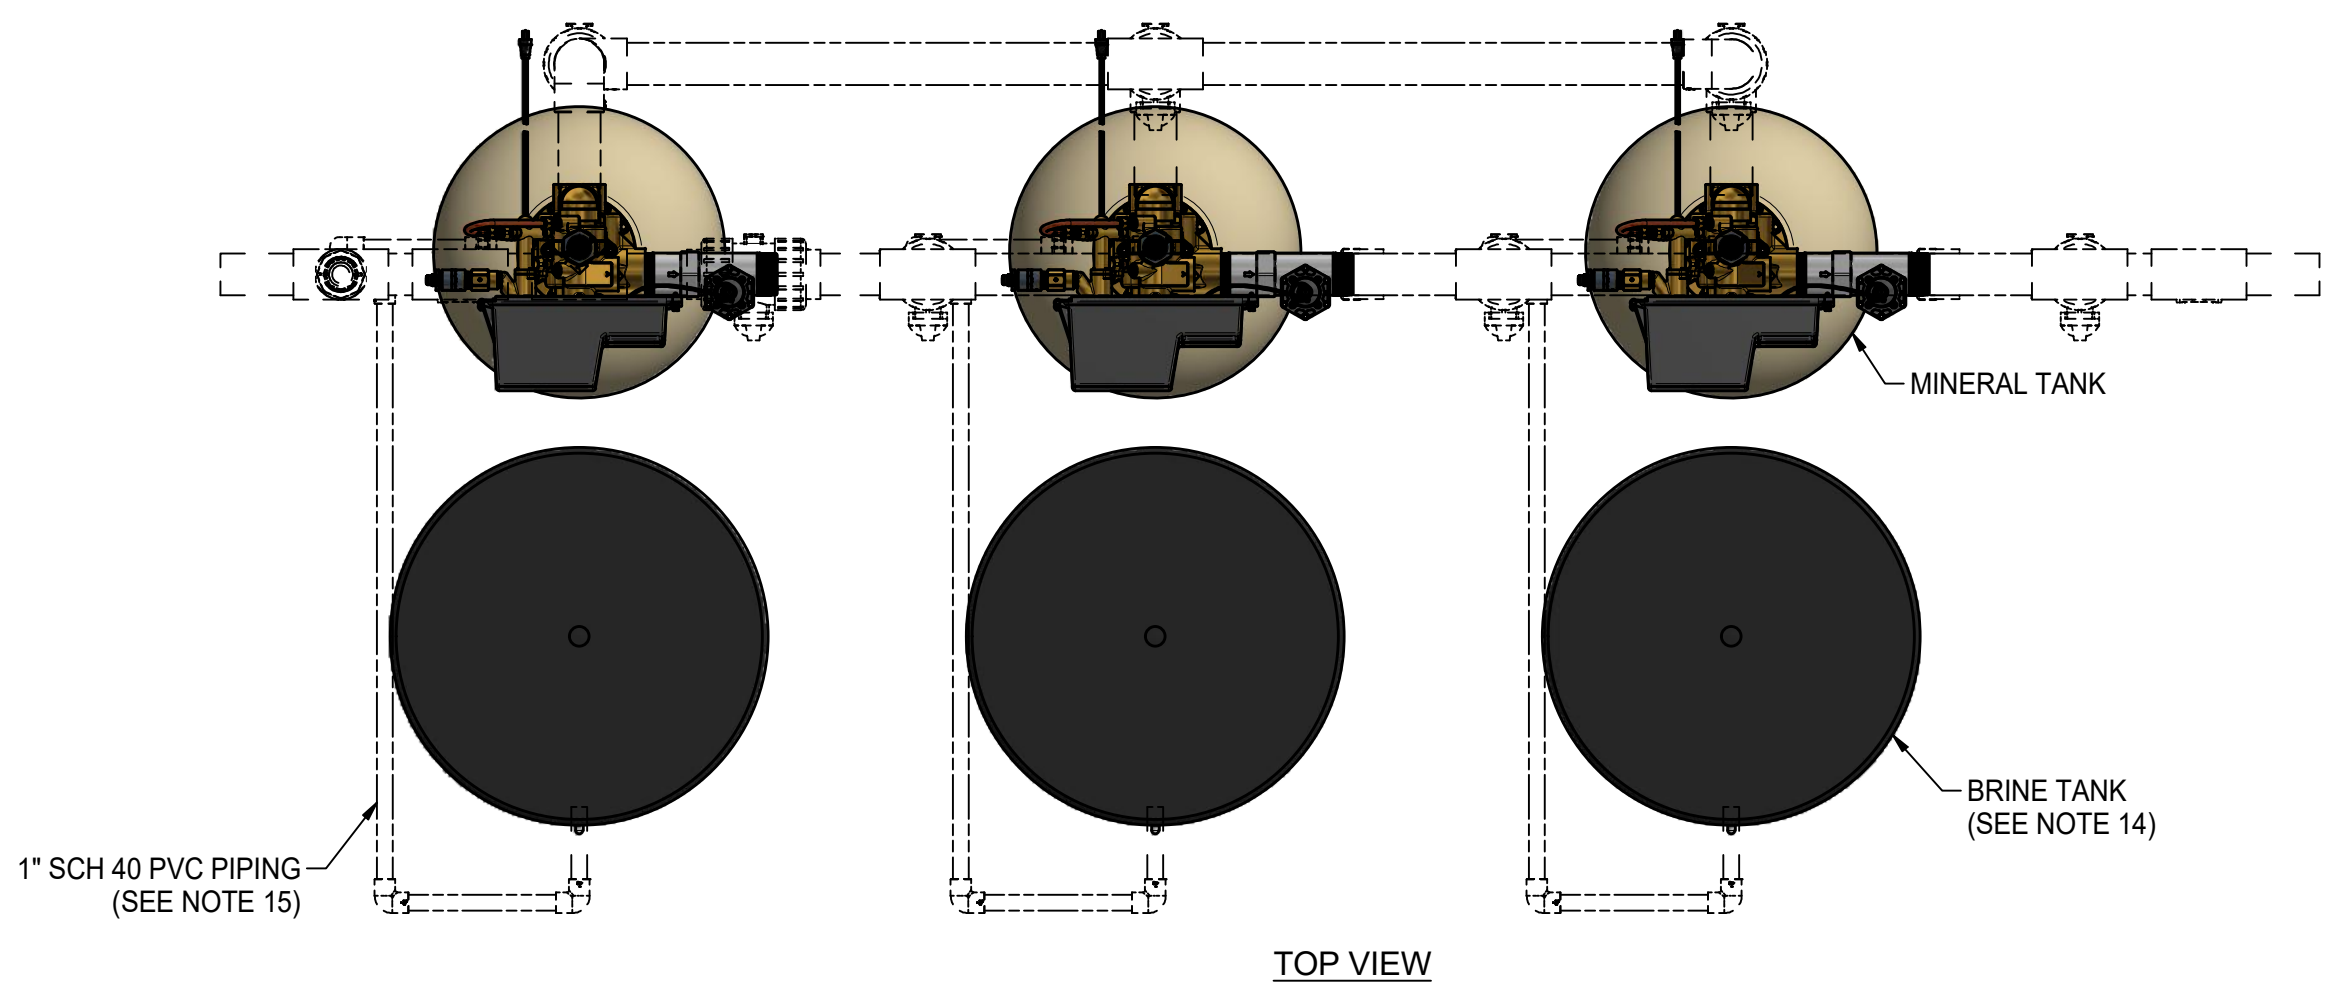

CLIENT PROJECT SIGN-OFF	
JOB NAME:	
JOB LOCATION:	
CONTRACTOR:	
CONTRACTOR APPROVAL:	
CONTRACTOR APPROVAL DATE:	
CONTRACTOR PO NO:	
ENGINEER:	
ENGINEER APPROVAL:	
ENGINEER APPROVAL DATE:	