

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____


Contractor's P.O. No. _____

Approval _____

Representative _____

RD-250 Flanged Cast Iron Combination Roof Drain/Overflow Specification

Watts RD-250 cast iron combination roof drain/overflow with deck flange, flashing clamps with integral gravel guards, overflow standpipe, self-locking cast iron domes, and no hub outlets.

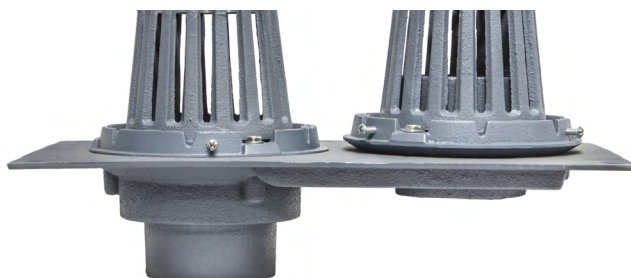


Call customer service if you need assistance with technical details.

Pipe Sizing		
Suffix	Description	
2	2"(51) Pipe Size	<input type="checkbox"/>
3	3"(76) Pipe Size	<input type="checkbox"/>
4	4"(102) Pipe Size	<input type="checkbox"/>

Options		
Suffix	Description	
-L	Vandal Proof Domes	<input type="checkbox"/>

Free Area Sq. In.
51

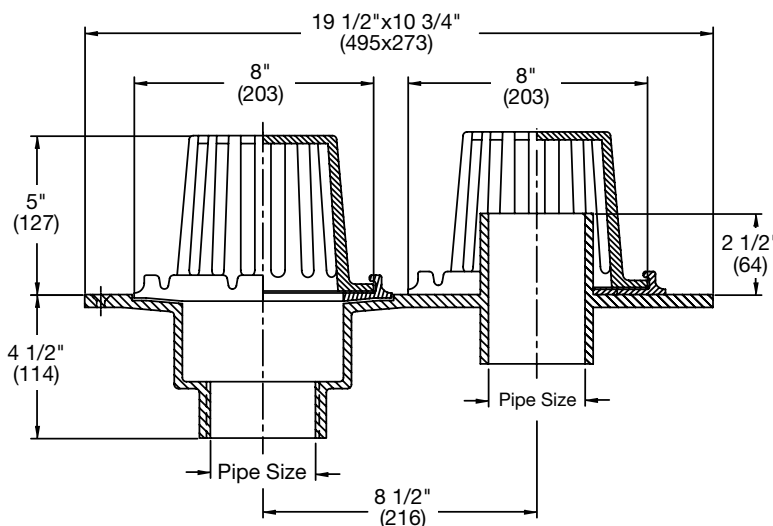

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com

Canada: T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-RD-250 2446

© 2024 Watts

