

Water & Steam Connectors

From the Makers of
the Blue Hose®



Leak tested and straight from Export, PA

Dormont.com

Dormont[®]
A WATTS Brand

Lead Free* Water Connector Solutions

Dormont Hi-PSI® Flex water connectors provide long, trouble-free service life, and permit quick, safe connection of hot and cold water service lines to moveable/castered and stationary food service equipment. Listed to NSF, these water connectors are composed of a stainless steel corrugated tube covered with a tight weave stainless steel braid. An optional gray PVC antimicrobial coating prevents the growth of bacteria, mold, and mildew.

Water Connectors

Applications:

Utility distribution systems, steam kettles, steamers, ice machines



- Stainless steel corrugated hose with braid
- 150 PSI maximum; hot water temperatures up to 225°F (107°C)
- NSF Listed to NSF/ANSI 169 and NSF/ANSI/CAN 372
- Available with PVC Coating or without



PART NUMBER BUILDER

W75BP2Q48

Inner Diameter (ID)

Coated/Uncoated
BP = Coated
B = Uncoated

Optional Accessory
2Q = 2-Way Quick Disconnect

Length of Connector (inches)

Combi Oven Water Connectors



- Stainless steel corrugated hose with braid
- Gray antimicrobial PVC coating
- Double Shut-off Quick Disconnect
- 125 PSI maximum; hot water temperatures up to 500°F (260°C)
- Lead Free* garden hose adapter
- NSF Listed to NSF/ANSI 169 and NSF/ANSI/CAN 372



PART NUMBER BUILDER

CMB37BP2Q48

Inner Diameter (ID)

Optional Accessory
2Q = 2-Way Quick Disconnect

Length of Connector (inches)

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Lead Free* Steam Connector Solutions

Dormont Lead Free* steam connectors provide a long, trouble-free service life while permitting quick, safe connection of steam lines to caster-mounted and stationary foodservice equipment.

Steam Connectors

Applications:

Appliances requiring a steam connection (steam kettles, steam tables, braising pans, steamers, combi ovens)



- Stainless steel corrugated hose with braid
- Orange Insulating sleeve and heat shield
- Available with Double Shut-Off Quick Disconnect
- 125 PSI maximum; hot water temperatures up to 500°F (260°C)
- NSF Listed to NSF/ANSI/CAN 372

PART NUMBER BUILDER

H50BIP2Q24

Inner Diameter (ID)

Optional Accessory
2Q = 2-Way Quick Disconnect

Length of Connector (inches)

Flexible design



Dormont Swirl Hose

The Dormont Lead Free* Swirl Hose quickly and easily connects water-fed appliances and equipment to the water supply line, making it easy to move equipment for cleaning without disconnecting the water supply. The flexible design of the swirl hose easily extends and retracts without damage.

Applications:

Ice machines, beverage equipment, coffee brewers, steamers, and more



- Made of durable, retractable, NSF-certified polyurethane
- Will not kink or crack like ordinary copper tubing
- NSF Listed to NSF/ANSI 169 and NSF/ANSI/CAN 372
- Available with Double Shut-off Quick Disconnect

PART NUMBER BUILDER*


71-1114-48

Inner Diameter (ID)

End Fitting Options

Elbow, Flare Adapter & Quick Disconnect Options

Length of Connector (inches)

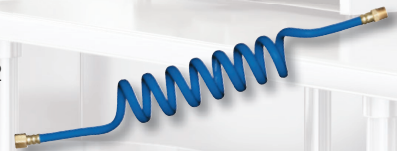

**Please reference the Dormont Foodservice Catalog for a full list of component configurations*



The Dormont Difference

For 70+ years, the Food Service Industry has trusted Dormont. Get the same quality, flexibility, and safety trusted in commercial kitchens across the globe at Dormont, your one-stop shop for safe gas, water, and steam connectors.

Scan for the full Dormont
Foodservice Catalog

