### **Engineering Specification**

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

## **FD-420**

## Grate & Frame for Parking Area Poured Catch Basin

#### Specification


Watts FD-420 epoxy coated fabricated steel catch basin frame with hinged cast iron grate

#### **Function**

Recommended for installation in garages, service and parking areas etc. subject to heavy vehicular traffic, where extra large facilities with catch basin are desired.

Call customer service if you need assistance with technical details.

Options		
Suffix	Description	
-13	All Galvanized	

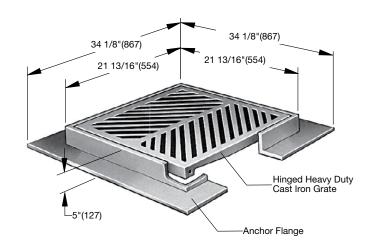

# Load Rating Free Area Sq. In. \*XHD 162

#### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

#### **NOTICE**

The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME ratings are as follows: XHD Safe Live Load 7500 - 10,000 lbs. (3375 - 4500kg) The above categories are given as a guide only. Consult factory.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

**USA:** T: (800) 338-2581 • Watts.com **Canada:** T: (888) 208-8927 • Watts.ca

**Latin America:** T: (52) 55-4122-0138 • Watts.com

ES-WD-FD-420-CAN 2343 © 2023 Watts )