




**GI-200**

Tag: \_\_\_\_\_

**Large Capacity Grease Interceptor on Floor or Semi-Recessed**

**SPECIFICATION:** Watts Drainage Products GI-200 epoxy coated inside and outside fabricated steel grease interceptor with flow rating of 350 to 600 GPM and grease capacity of 700 to 1200 LBS. Unit shall include removable baffles, code approved deep seal trap, cover securing bolt(s), removable stainless steel calibrated orifice plate and epoxy coated non-skid cover.

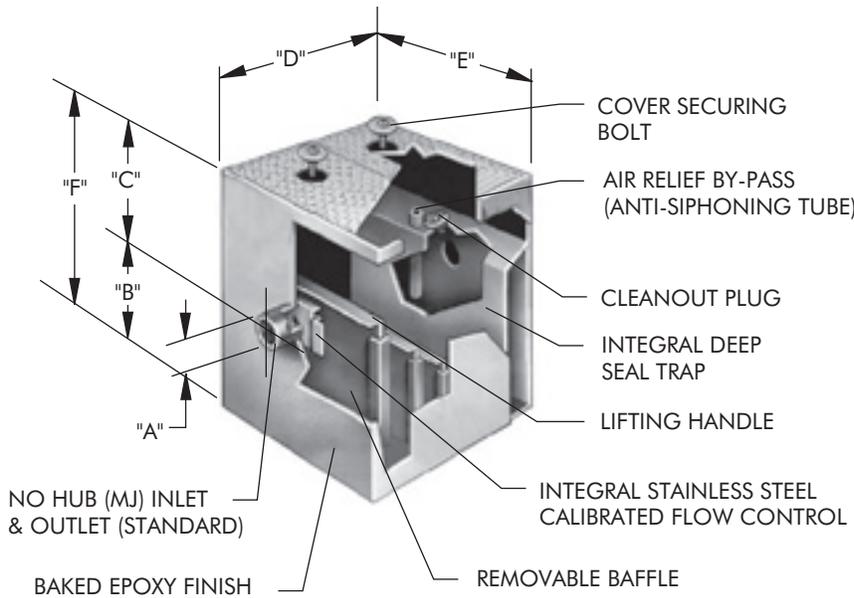

Order Code: GI-  -  -

Ex. GI-240-T-F

Flow Rate (Select One)		
Suffix	Description	
235	350 GPM	<input type="checkbox"/>
240	400 GPM	<input type="checkbox"/>
250	500 GPM	<input type="checkbox"/>
260	600 GPM	<input type="checkbox"/>

Options (Select One or More)		
Suffix	Description	
-B	Lift Out Bucket	<input type="checkbox"/>
-DI	Dual Inlet	<input type="checkbox"/>
-E	Electronics	<input type="checkbox"/>
-F	Flange	<input type="checkbox"/>
-FC	Flange w/ Mem. Clamp	<input type="checkbox"/>
-HDC	Heavy Duty Cover 1,000 lbs.	<input type="checkbox"/>
-IP	Injection Port (specify location)	<input type="checkbox"/>
-O	Inlet & Outlet other than standard	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>
-T	Threaded Connection	<input type="checkbox"/>
-X	Extension as Required	<input type="checkbox"/>
-XHDC	Extra Heavy Duty Cover 10,000 lbs.	<input type="checkbox"/>

Optional Inlet/Outlet Sizes (When -O is selected above)		
Suffix	Description	
-4	4"(102) Inlet/Outlet	<input type="checkbox"/>
-6	6"(152) Inlet/Outlet	<input type="checkbox"/>

**GI-235 to GI-260 three piece cover.**

Cubic Capacity of Fixtures in Inches	Interceptor Catalog Number	Grease Capacity Lbs	Flow Rate GPM	A	B	C	D	E	F	DI
				Inlet & Outlet	Base to Center	Top to Center	Length	Width	Height	Between Inlet Centres
92001 to 107000	GI-235	700	350	6"(152)	39"(991)	10"(254)	79"(2007)	50"(1270)	49"(1245)	9"(229)
107001 to 122000	GI-240	800	400	6"(152)	42"(1067)	10"(254)	83"(2108)	55"(1397)	52"(1321)	9"(229)
122001 to 154000	GI-250	1000	500	6"(152)	53"(1346)	10"(254)	91"(2311)	60"(1524)	63"(1600)	9"(229)
154001 to 188000	GI-260	1200	600	8"(203)	60"(1524)	10"(254)	100"(2540)	72"(1829)	70"(1778)	12"(305)

Job Name \_\_\_\_\_ Model No. \_\_\_\_\_

Job Location \_\_\_\_\_ Contractor \_\_\_\_\_

Engineer \_\_\_\_\_ Representative \_\_\_\_\_



Specification Drainage Products

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



CANADA: 5435 North Service Road, Burlington, ON, L7L 5H7 TEL: 905-332-6718 TOLL-FREE: 1-888-208-8927 Website: www.wattscanada.ca