

MS-810


Tag: _____

Trap Seal Primer

SPECIFICATION: Watts Drainage Products MS-810 all brass trap seal primer with integral vacuum breaker, 1/2"(13) copper sweat inlet and outlet connection, and 1/2"(13) IPS drip line connection.

FUNCTION: Installed in cold water supply line to provide intermittent water supply to floor drain trap to ensure a constant trap seal.

OPERATION: Rates of flow greater than 1.5 GPM(US) when installed in a horizontal supply line will cause poppet to raise from seat and allow a metered amount of water to enter trap supply line. Closing of valve will cause poppet to reseat. Air gap ports on each side of valve provide for visual inspection of flow from primer to trap and acts as a vacuum breaker.

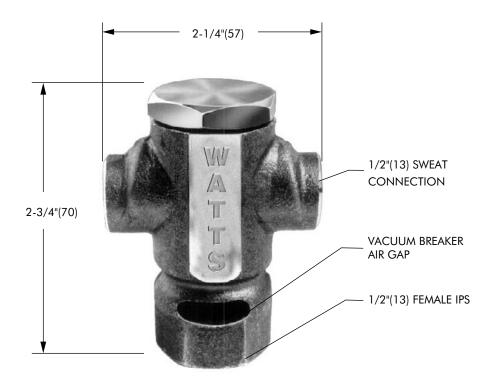

Job Name	Contractor
Job Location	Contractor's P.O. No.
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



CANADA: 5435 North Service Road, Burlington, ON, L7L 5H7 TEL: 905-332-6718 TOLL-FREE: 1-888-208-8927 Website: www.wattsdrainage.ca

(Dimension) Denotes Millimeters