

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Tag _____

FD-530


Heavy Duty Floor Drain with Offset Bottom Outlet

Specification

Watts FD-530 epoxy coated side outlet floor drain with epoxy coated fabricated steel body and extra heavy duty 12"x24"(305x610) two section ductile iron grate.

Pipe Sizing	
Suffix	Description
2	2"(51) Pipe Size
3	3"(76) Pipe Size
4	4"(102) Pipe Size
6	6"(152) Pipe Size

Options	
Suffix	Description
-C	Membrane Clamp
-6	Vandal Proof
-10	Secured Top /w Phillips Screws
-12	Galvanized Top
-13	All Galvanized
-28	All 304 Stainless Steel (CF9)
-31	Flange
-38	Solid Retaining Baffle

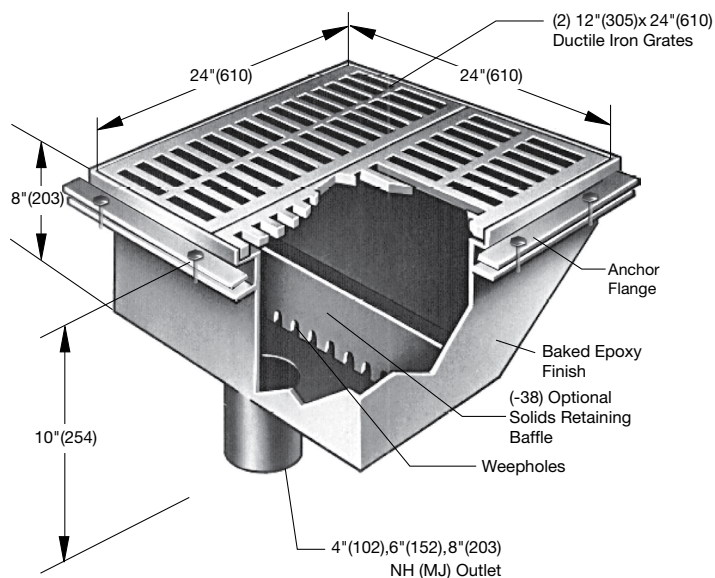

Load Rating & Free Area	
Load Rating	Free Area Sq. In.
*XHD	208

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

NOTICE

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
 XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg)
 The above categories are given as a guide only.
 Please consult factory.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com
Canada: T: (888) 208-8927 • Watts.ca
Latin America: T: (52) 55-4122-0138 • Watts.com